




# Mechanical Dimensions

	First Release

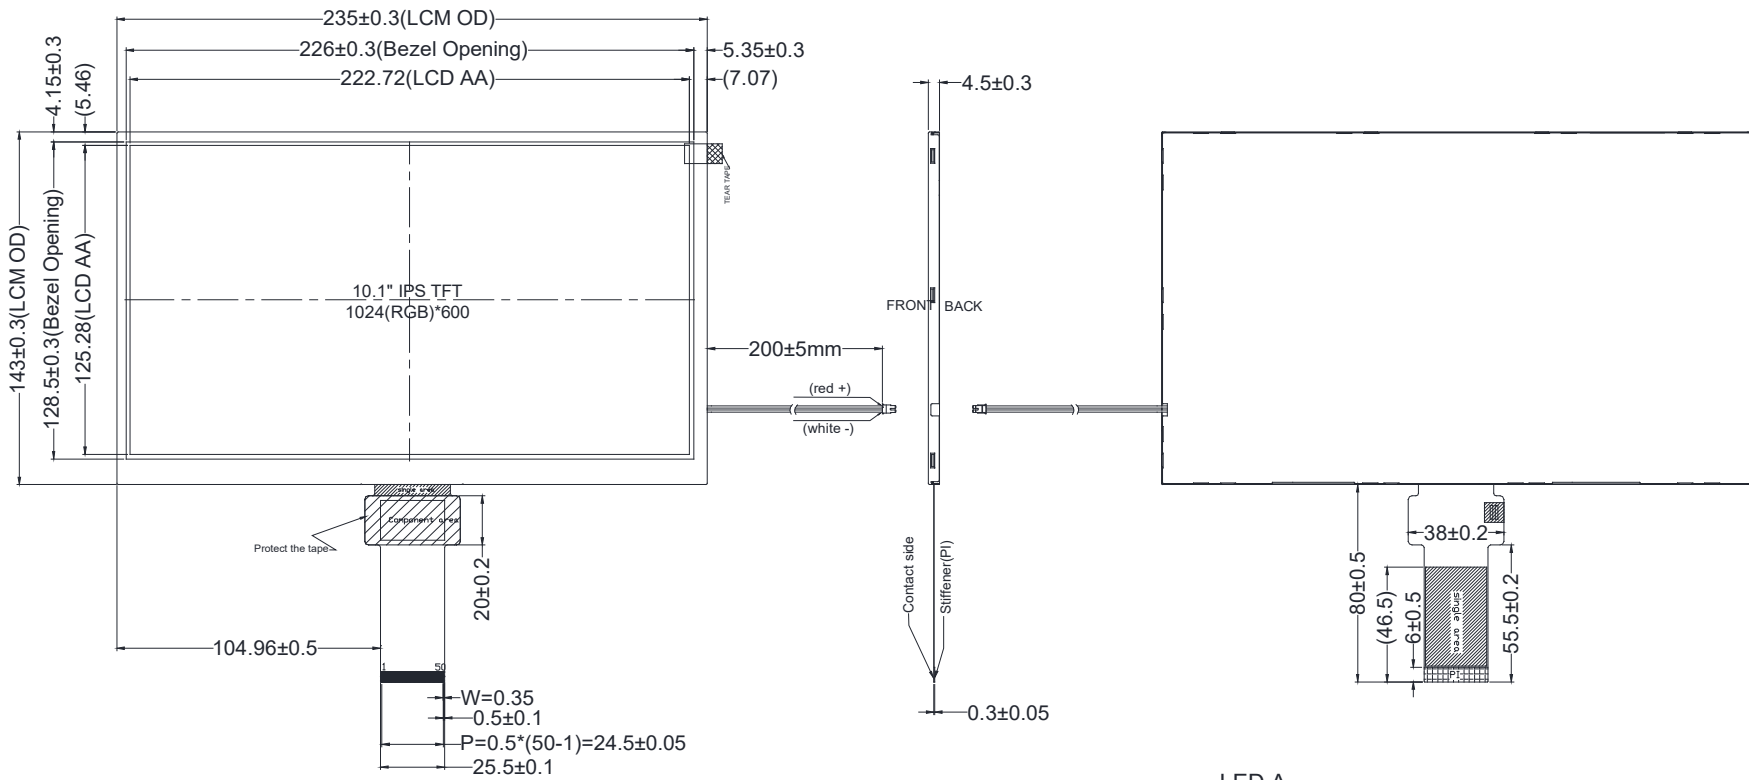

PIN	SYMBOL
1	VLED+
2	VLED+
3	VLED-
4	VLED-
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

- Notes:
1. Display size: 10.1" IPS TFT
  2. Viewing direction: All View
  3. Display mode: Transmissive/Normal Black
  4. Operating temperature: -20°C~+70°C
  5. Storage temperature: -30°C~+80°C
  6. Backlight: White(40LEDs)/16V/160mA  
Brightness: 400 cd/m<sup>2</sup>(TYP)
  7. Power supply voltage: 3.0V  
HX8282-A01&HX8696-A01
  8. RoHS compliant
  9. General tolerance: ±0.3mm

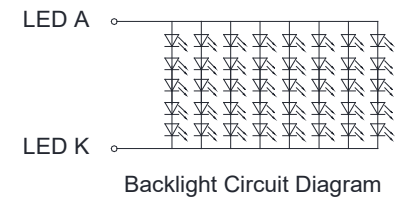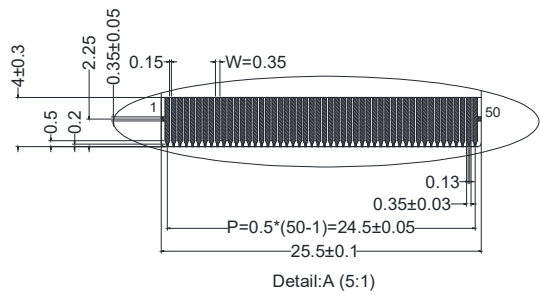

**LOGIC TECHNOLOGIES**

Part Number	Revision
LTTD1024600101-L1	A
	Sheet: 1/1

A  
B  
C  
D  
E  
F

A  
B  
C  
D  
E  
F

1 2 3 4 5 6