
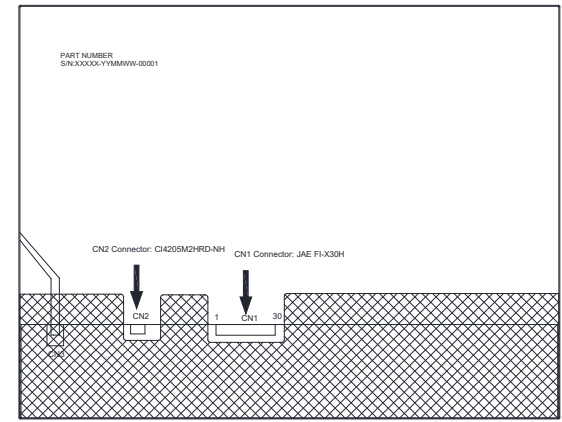


Mechanical Dimensions

⚠	First Release
⚠	
⚠	

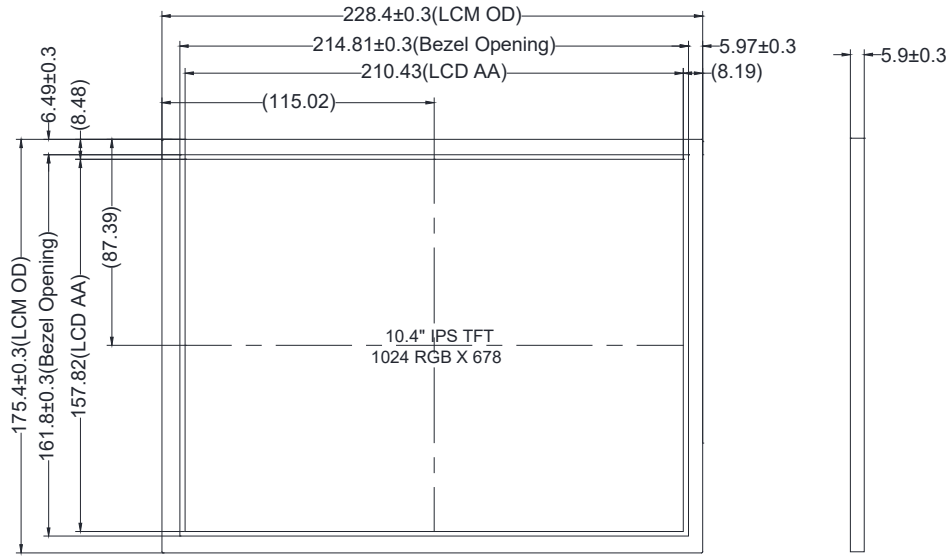

CN1:


PIN	SYMBOL
1	NC
2	GND
3	RXIN3+
4	RXIN3-
5	GND
6	RXCLK+
7	RXCLK-
8	GND
9	RXIN2+
10	RXIN2-
11	GND
12	RXIN1+
13	RXIN1-
14	GND
15	RXIN0+
16	RXIN0-
17	GND
18	NC
19	GND
20	SEL6/8
21	NC
22	NC
23	NC
24	REVERSE
25	GND
26	GND
27	GND
28	VDD
29	VDD
30	VDD

CN2:

PIN	SYMBOL
1	LED-VCCS
2	LED-VCCS
3	GND
4	LED-PWM
5	LED-EN

Notes:

1. Display size: 10.4" IPS TFT
2. Viewing direction: All View
3. Display mode: Transmissive/Normal Black
4. Operating temperature: -20°C~+70°C
5. Storage temperature: -30°C~+80°C
6. Backlight: White(36LEDs)/27V/240mA
Brightness: 500 cd/m²(TYP)
7. Power supply voltage: 3.3V
8. RoHS compliant
9. General tolerance: ±0.3mm

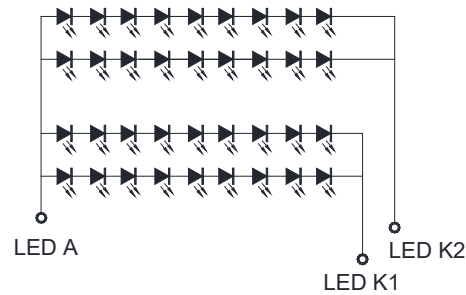

Backlight Circuit Diagram

LOGIC TECHNOLOGIES

Part Number	Revision
LTTD1024768104-L2	A
Not to scale. Unit mm.	Sheet: 1/1