
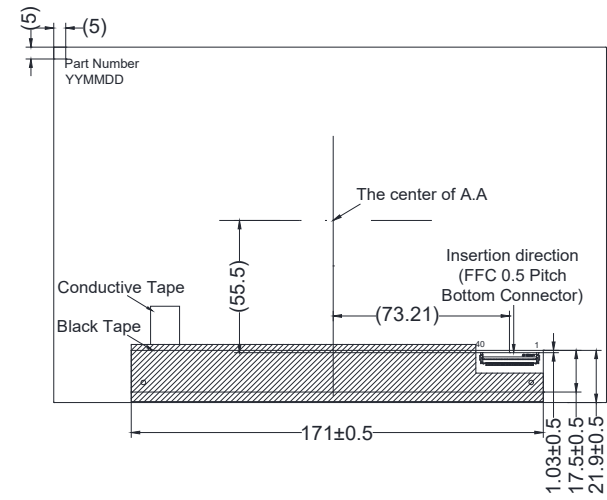
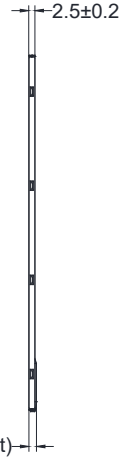


Mechanical Dimensions

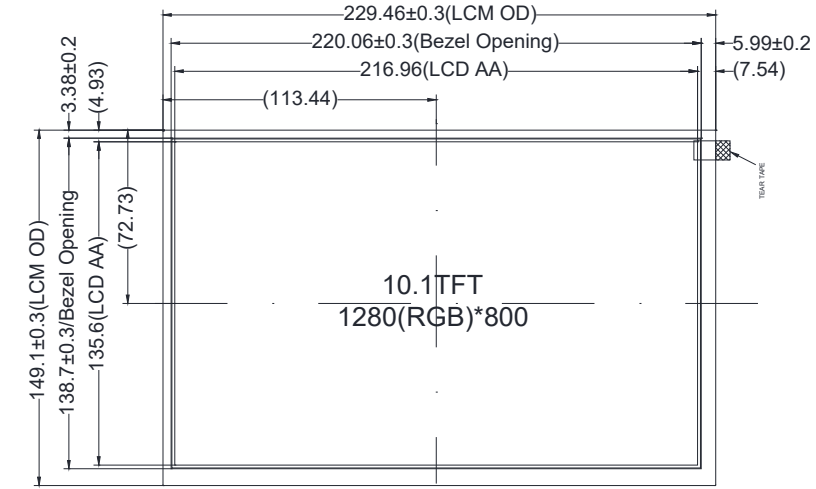


△	First Release
△	
△	

TFT I/F:


NO.	Pin name
1	NC
2	VDD
3	VDD
4	NC
5	NC
6	NC
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	NC
29	AVDD
30	GND
31	LED-
32	LED-
33	NC
34	NC
35	VGL
36	NC
37	NC
38	VGH
39	LED+
40	LED+

Notes:

1. Display size: 10.1" IPS TFT
2. Viewing direction: All View
3. Display mode: Transmissive/Normal Black
4. Operating temperature: -20°C~+70°C
5. Storage temperature: -30°C~+80°C
6. Backlight: White(42LEDs)/9.6V/280mA
Brightness: 420 cd/m²(TYP)
7. Power supply voltage: 3.3V
8. RoHS compliant
9. General tolerance: ±0.3mm

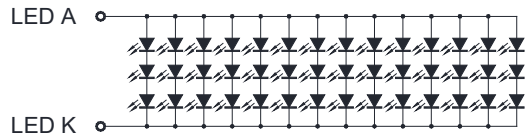

Backlight Circuit Diagram



LOGIC TECHNOLOGIES

Part Number	Revision
LTTD1280800101-L5	A
Not to scale. Unit mm.	
Sheet: 1/1	