
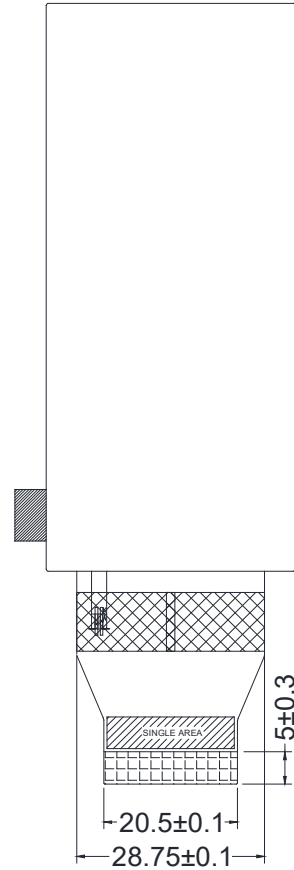
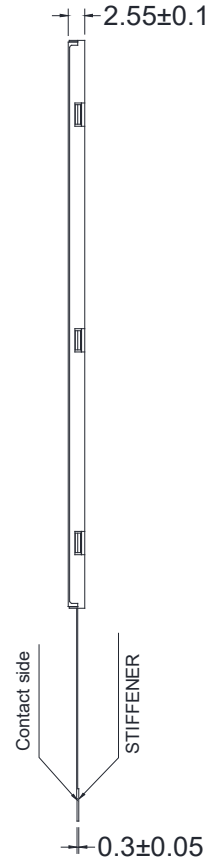


# Mechanical Dimensions

	First Release

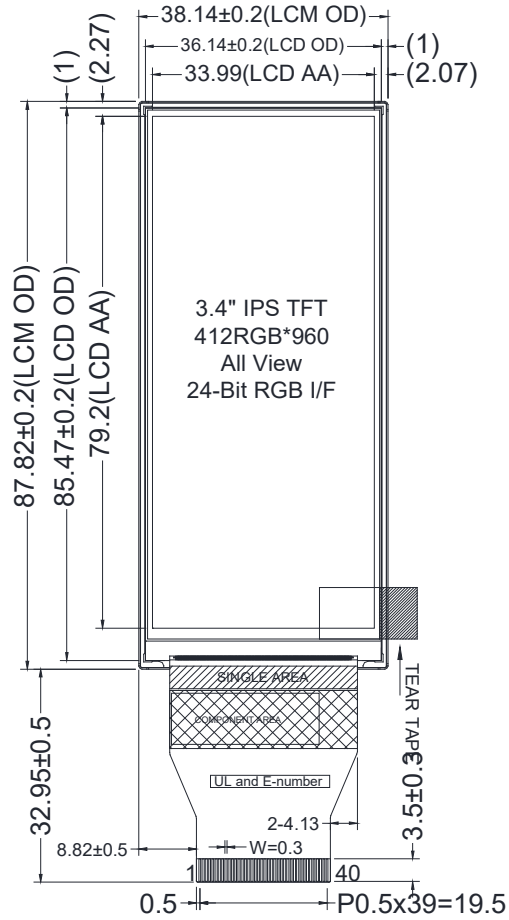

LCM

1	LED K
2	LED A
3	RESET
4	VCC
5	CS
6	SCL
7	SDA
8	GND
9	PCLK
10	GND
11	VS
12	HS
13	DE
14	GND
15	DB0
16	DB1
17	DB2
18	DB3
19	DB4
20	DB5
21	DB6
22	DB7
23	DB8
24	DB9
25	DB10
26	DB11
27	DB12
28	DB13
29	DB14
30	DB15
31	DB16
32	DB17
33	DB18
34	DB19
35	DB20
36	DB21
37	DB22
38	DB23
39	GND
40	GND

**Notes:**

1. Display size: 3.4" IPS TFT
2. Viewing direction: All
3. Display mode: Transmissive/Normal Black
4. Operating temperature: -20°C~+70°C
5. Storage temperature: -30°C~+80°C
6. Backlight: White(6LEDs)/19.2V/20mA  
Brightness: 310 cd/m<sup>2</sup>(Typ)
7. Power supply voltage: 2.8V (ST7701S)
8. RoHS compliant
9. General tolerance: ±0.3mm



LED Circuit Diagram

**LOGIC TECHNOLOGIES**

Part Number	Revision
LTTD412960034-L1	A
Not to scale. Unit mm.	
Sheet: 1/1	