
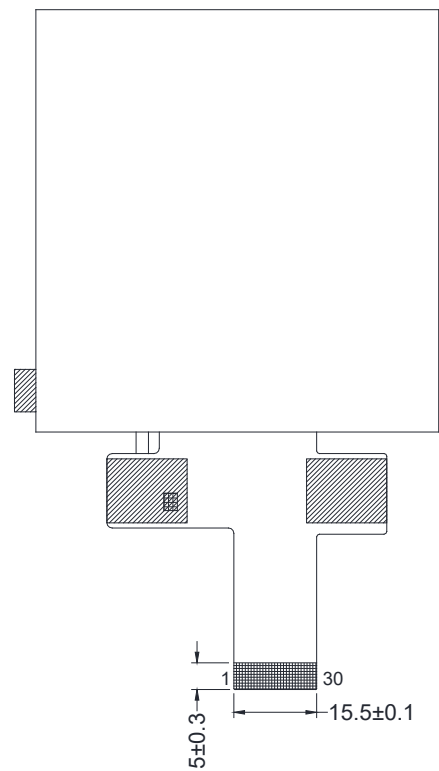
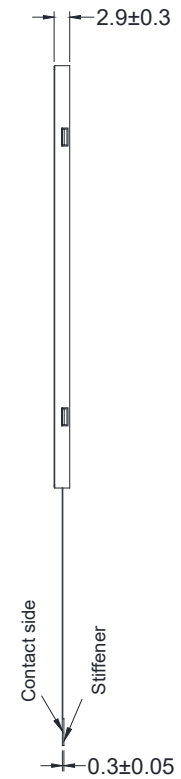


# Mechanical Dimensions

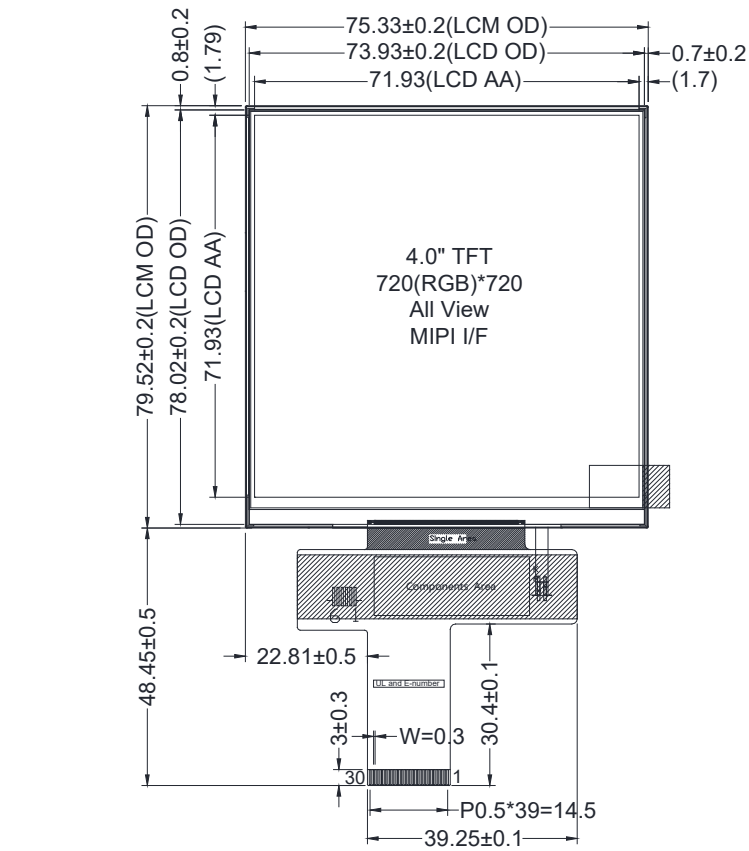



△	First Release
△	
△	

## LCM

PIN	SYMBOL
1	LED K
2	LED A1
3	LED A2
4	VCI
5	IOVCC
6	RESET
7	TE
8	PWM
9	GND
10	D0_P
11	D0_N
12	GND
13	D1_P
14	D1_N
15	GND
16	CK_P
17	CK_N
18	GND
19	D2_P
20	D2_N
21	GND
22	D3_P
23	D3_N
24	GND
25	NC(TP_INT)
26	NC(TP_SDA)
27	NC(TP_SCL)
28	NC(TP_RST)
29	NC(TP_VCI)
30	NC(TP_IOVCC)

- Notes:
1. Display size: 4.0" IPS TFT
  2. Viewing direction: All View
  3. Display mode: Transmissive/Normal Black
  4. Operating temperature: -20°C~+70°C
  5. Storage temperature: -30°C~+80°C
  6. Backlight: White(8LEDs)/12.8V/40mA  
Brightness: 370 cd/m<sup>2</sup>(Typ)
  7. Power supply voltage: 2.8V (ICNL9707AC)
  8. RoHS compliant
  9. General tolerance: ±0.3mm

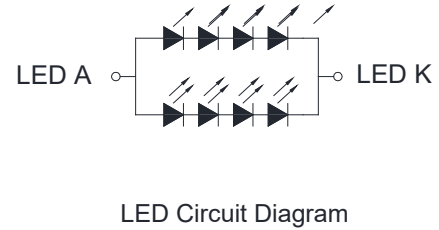



**LOGIC TECHNOLOGIES**

Part Number	Revision
LTTD720720040-L2	A
Not to scale. Unit mm.	
Sheet: 1/1	