


Mechanical Dimensions

△ First Release
 ▽
 ○


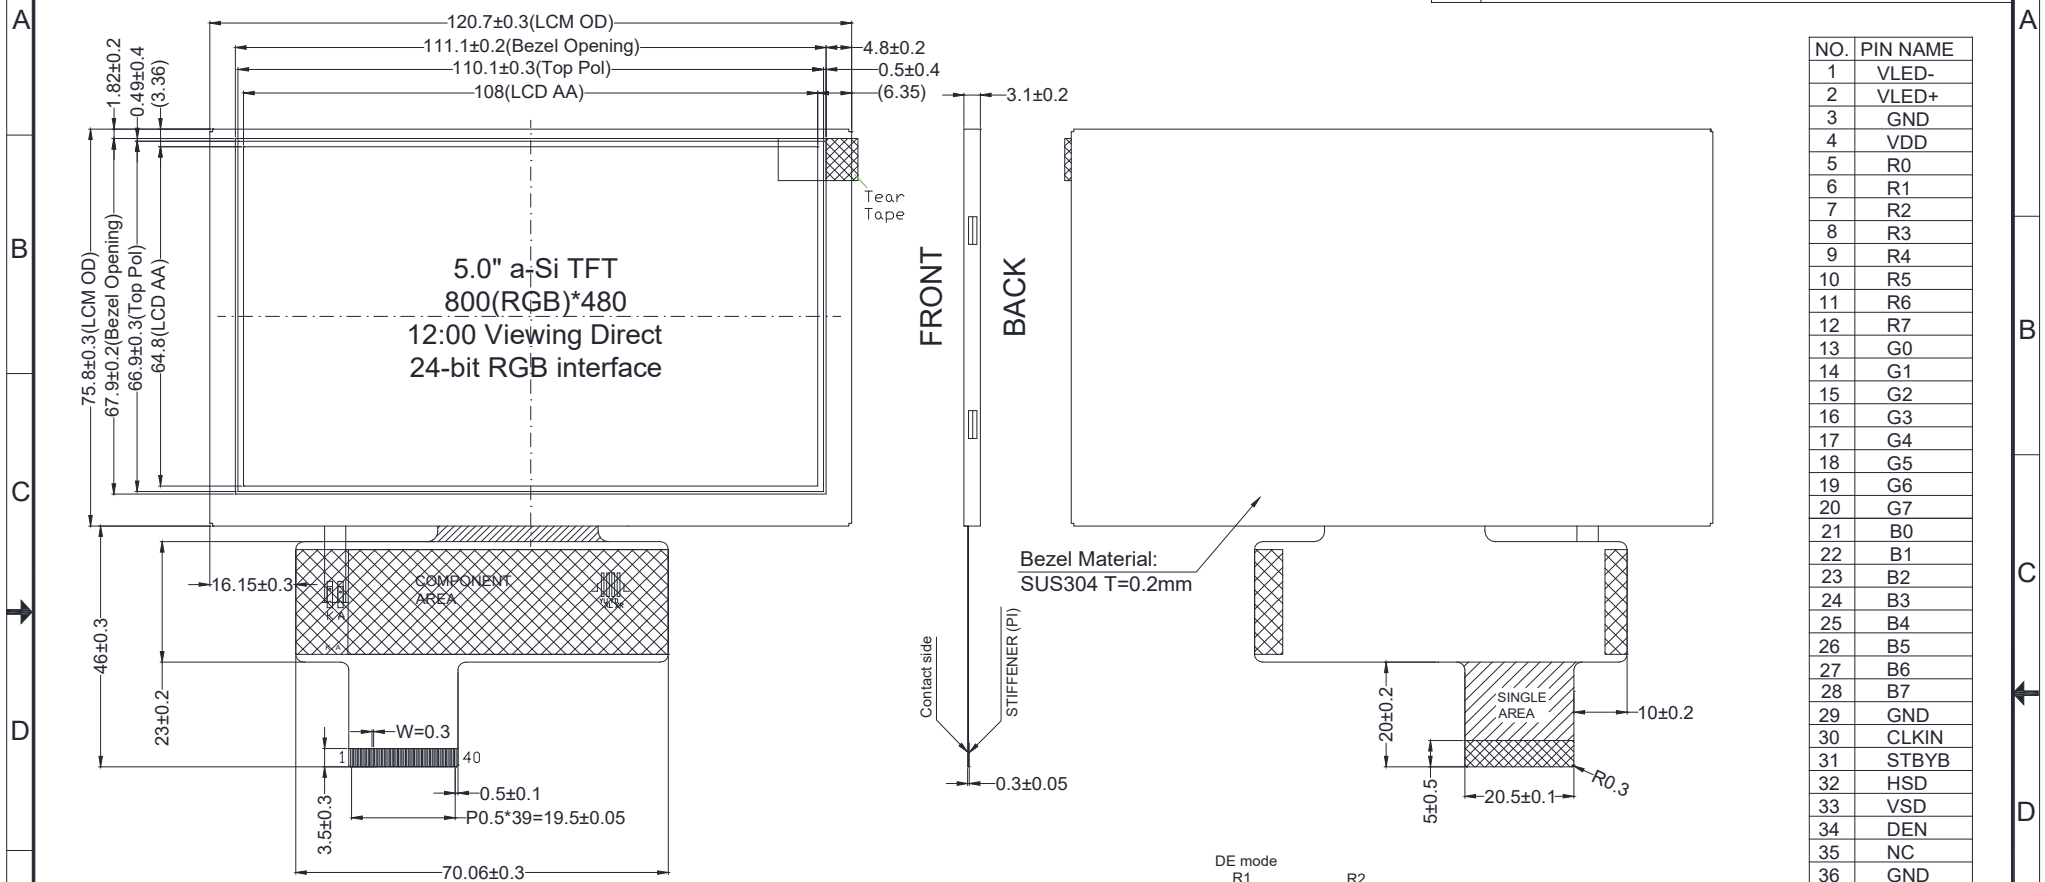


NO.	PIN NAME
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLKIN
31	STBYB
32	HSD
33	VSD
34	DEN
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)


Notes:

1. Display size: 5" TN TFT
2. Viewing direction: 12:00 O'Clock
 Grayscale Inversion Direction: 6:00 O'Clock
3. Display mode: Transmissive/Normal White
4. Operating temperature: -20°C~+70°C
5. Storage temperature: -30°C~+80°C
6. Backlight: White(18LEDs)/18.6V/60mA
 Brightness: 770 cd/m²(Typ, with 3M film)
7. Power supply voltage: 3.3V
 (ILI6122&ILI5960)
8. RoHS compliant
9. General tolerance: ±0.3mm

Bezel Material:
 SUS304 T=0.2mm

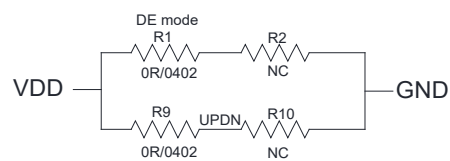

Backlight Circuit Diagram



LOGIC TECHNOLOGIES

Part Number	Revision
LTTD800480050-L6	A
Not to scale. Unit mm.	
Sheet: 1/1	