
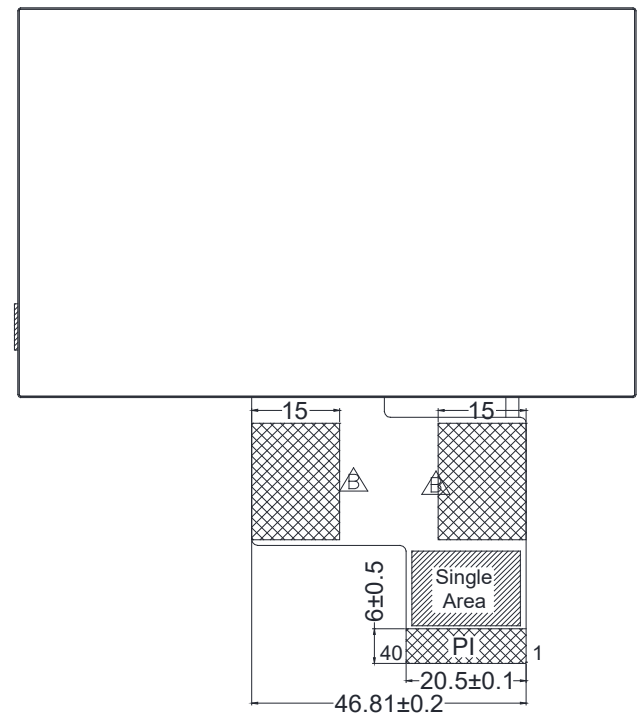
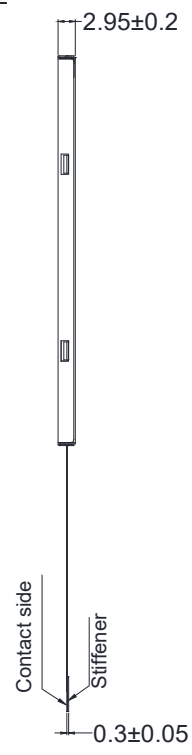



# Mechanical Dimensions

	First Release

PIN	SYMBOL
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DISP
31	DEN
32	GND
33	CLK
34	GND
35	HSYNC
36	VSYNC
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

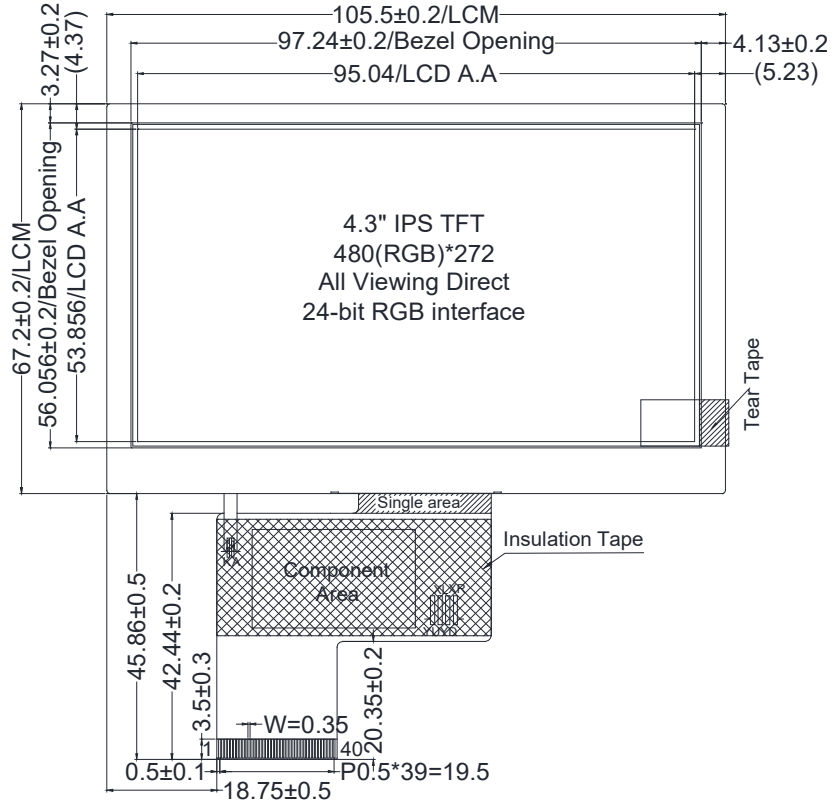

- Notes:
1. Display size: 4.3" IPS TFT
  2. Viewing direction: All View
  3. Display mode: Transmissive/Normal Black
  4. Operating temperature: -20°C~+70°C
  5. Storage temperature: -30°C~+80°C
  6. Backlight: White(12LEDs)/12.8V/60mA  
Brightness: 500 cd/m<sup>2</sup>(TYP)
  7. Power supply voltage: 3.3V (ST7283)
  8. RoHS compliant
  9. General tolerance: ±0.3mm

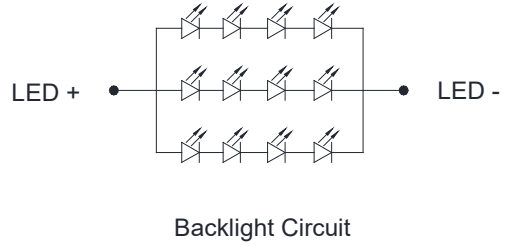

**LOGIC TECHNOLOGIES**

Part Number	Revision
LTTD480272043-L6	A
Not to scale. Unit mm.	
Sheet: 1/1	